


## 2480 - Kebony Clear railing 38 x 68

Kebony Clear products are produced from FSC® certified Radiata Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Clear products have a primarily clear front surface and are treated through the board.

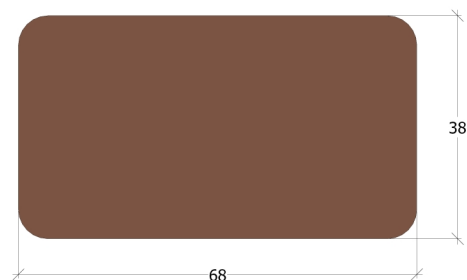

### Quality and Technical data

|                     |                                          |                                                                                                                                                                                                  |      |                      |
|---------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------------|
| Profile             | Railing                                  | Density (12 % mc)                                                                                                                                                                                | 670  | Kg/m3                |
| Dimension           | 38 x 68                                  | Hardness (EN 1534)                                                                                                                                                                               | 4.2  | Brinell              |
| Weight              | 1.73 Kg/lm                               |                                                                                                                                                                                                  |      |                      |
|                     |                                          | Max swelling (dry to wet, tangential direction)                                                                                                                                                  | 4    | %                    |
|                     |                                          | Decay resistance (EN 350)                                                                                                                                                                        | 1    | Durability class 1-5 |
|                     |                                          | Use class (EN 335)                                                                                                                                                                               | 3.2* |                      |
|                     |                                          | Fire Class Untreated                                                                                                                                                                             |      |                      |
| Knots/Pitch pockets | No knots                                 | There may be defects on the back side. These will not affect the technical quality of the product.<br>* Installed as per Kebony installation guidelines;** Not suitable for outdoor applications |      |                      |
| Cupping             | Max 1% of width                          |                                                                                                                                                                                                  |      |                      |
| Crook               | 3-3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm |                                                                                                                                                                                                  |      |                      |
| Moisture            | 4-8 %                                    |                                                                                                                                                                                                  |      |                      |
| Cracks              | Surface cracks and checks may be visible |                                                                                                                                                                                                  |      |                      |
| Wane                | May occur on the back                    |                                                                                                                                                                                                  |      |                      |

### Weathered



### Certifications

EUTR



FSC

CU-COC-813689



The mark of responsible forestry

SWAN

2086 001



2086 0001

### Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

### Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.