


2449 - Kebony Character Roof Board Shiplap 28 x 148

Kebony Character products are produced from PEFC® certified Scots Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Character products contain knots and untreated heartwood. The amount of heartwood will vary from board to board.

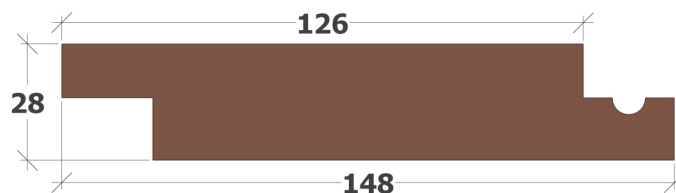

Quality and Technical data

Profile	Shiplap with groove	Density (12 % mc)	570	Kg/m3
Dimension	28 x 148	Hardness (EN 1534)	2-3	Brinell
Weight	2.36 Kg/lm	Bending strength (MOR)	49.7	MPa
NB LM/M²		Max swelling (dry to wet, tangential direction)	6	%
End-treatment		Decay resistance (EN 350)	1-2***	Durability class 1-5
Finish	Standard	Use class (EN 335)	3.2*	
Knots/Pitch pockets	Contains only live knots	Fire Class Untreated		
Cupping	Max 2,5% of width	* Due to the Kebony process the dimension of the profile can vary +/-3% ** Not suitable for outdoor applications;*** Sapwood (Heartwood of scots pine has dur. class 3);* Installed as per Kebony installation guidelines		
Crook	Max 5mm / 2 m			
Moisture	8-14 %			
Cracks	Surface cracks may be visible			
Wane	May occur on the back			

Weathered



Certifications

EUTR



SWAN

2086 001



SINTEF

TG 2493



PEFC

PEFC/03-31-36



Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.