


2843 - Kebony Clear Shiplap 90° 1SLR Cladding 22 x 145

Kebony Clear products are produced from FSC® certified Radiata Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Clear products have a primarily clear front surface and are treated through the board.

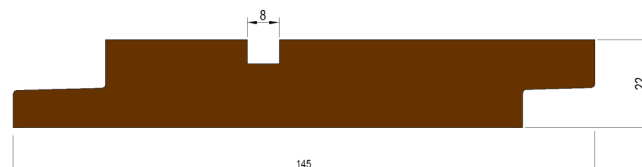

Quality and Technical data

Profile	Shiplap	Density (12 % mc)	637	Kg/m3
Dimension	22 x 145	Hardness (EN 1534)	4.1	Brinell
Weight	2.03 Kg/lm	Bending strength (MOR)		MPa
NB LM/M²	7.69	Max swelling (dry to wet, tangential direction)	4	%
End-treatment	End-matched	Decay resistance (EN 350)	2	Durability class 1-5
Finish	Satin	Use class (EN 335)	3.1*	
Knots/Pitch pockets	May be visible and are a natural occurrence in wood	Fire Class Untreated	D-s2,d0	
Cupping	Max 1% of width	There may be defects on the back side. These will not affect the technical quality of the product. * Suitable for outdoor applications above ground;** Ongoing long-term testing		
Crook	3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm			
Moisture	4-8 %			
Cracks	Surface cracks may be visible			
Wane	May occur on the back			

Weathered



Certifications

CE
EN 14915



EUTR



FSC

CU-COC-813689



The mark of
responsible forestry

SWAN

2086 001



Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.