


2752 - Kebony Clear rough sawn 38 x 100

Kebony Clear products are produced from FSC® certified Radiata Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Clear products have a primarily clear front surface and are treated through the board.

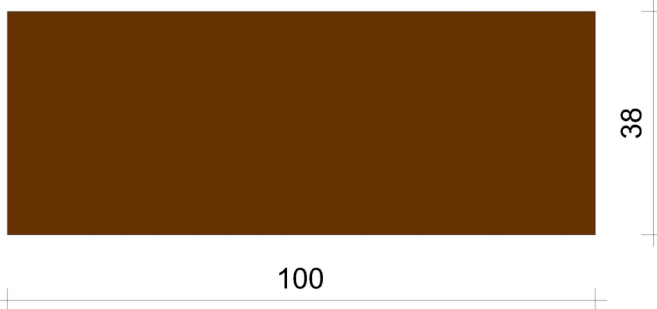

Quality and Technical data

Profile	Rough	Density (12 % mc)	670	Kg/m3
Dimension	38 x 100	Hardness (EN 1534)	4.2	Brinell
Weight	2.55 Kg/lm	Bending strength (MOR)		MPa
NB LM/M²		Max swelling (dry to wet, tangential direction)	4	%
End-treatment	Rough	Decay resistance (EN 350)	1	Durability class 1-5
Finish	Rough	Use class (EN 335)	3.2*	
Knots/Pitch pockets	No knots	Fire Class Untreated		
Cupping	Max 1% of width	There may be defects on the back side. These will not affect the technical quality of the product. * Installed as per Kebony installation guidelines;** Not suitable for outdoor applications		
Crook	3-3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm			
Moisture	4-8 %			
Cracks	Surface cracks and checks may be visible			
Wane	May occur on the back			

Weathered



Certifications

EUTR



EPD

NEPD-407-287-EN



FSC

CU-COC-813689



SWAN

2086 001



Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.