


Kebony Character Shiplap 1SL 21 x 148

Product Description

Kebony Character products are produced from FSC® certified Scots Pine modified with a bio-based liquid. The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning. Kebony Character products contain knots and untreated heartwood. The amount of heartwood will vary from board to board.

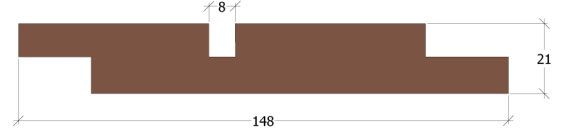

Quality and Appearance upon delivery

Profile	Shiplap
Dimension	21 x 148
Standard Length(s)	3,5 - 4,1 - 4,7 m. For availability and possible alternative lengths please contact your Kebony representative or our local Kebony trade partner.
End-treatment	
Finish	Standard
Knots/Pitch pockets	May be visible and are a natural occurrence in wood
Cupping	Max 1% of width
Crook	3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm
Moisture	4-8 %
Cracks	Surface cracks may be visible
Wane	May occur on the back
NOTE	There may be defects on the back side. These will not affect the technical quality of the product.

Kebony Character products are produced from FSC® certified Scots Pine modified with a bio-based liquid. The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning. Kebony Character products contain knots and untreated heartwood. The amount of heartwood will vary from board to board.

Technical data (average values)

	Kebony	Untreated	
Density (12 % mc)	637	490	Kg/m ³
Hardness (EN 1534)	4.1	2	Brinell
Max swelling (dry to wet, tangential direction)	4	8	%
Decay resistance (EN 350)	2**	5	Durability class 1-5
Use class (EN 335)	3.1*	1	

* Suitable for outdoor applications above ground; ** Ongoing long-term testing

Certifications

FSC CU-COC-813689 - www.fsc.org
 Nordic Ecolabel 2086 0001 - www.nordic-ecolabel.org
 EPD: NEPD-407-287-EN - www.epd-norge.no
 CE marked according to EN 14915
 Norwegian Technical Approval
 Complies with EU Timber Regulation (EUTR)
 Kebony installation guide for cladding - www.kebony.com



Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC)

Waste handling as ordinary wood.

Disclaimer

Up to 5% of the delivered boards may be outside this specification and must to be accepted.

Kebony products will change in appearance when exposed to rain and sun. Colour changes and surface cracks will occur due to natural weathering. The manufacturer cannot be held liable for any such variations in colour and surface appearance. This will not influence durability and overall performance of the product.

Kebony Character products should not be further machined or split as untreated heartwood will be exposed. Kebony Character products can be cross-cut to length. Exposed end grain after cross-cutting must be treated with a wood preservative.

Kebony is continuously working on product development. Information in this datasheet may be changed without further notice.



Natural wood
Made to last

Product datasheet

Item nr 2339

Updated 2024-05-17

www.kebony.com | info@kebony.com

Kebony Character Shiplap 1SL 21 x 148