


Kebony Character products are produced from PEFC® certified Scots Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Character products contain knots and untreated heartwood. The amount of heartwood will vary from board to board.

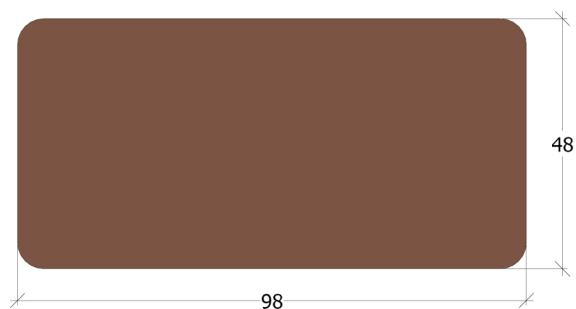

Quality and Technical data

Profile	Beam	Density (12 % mc)	570	Kg/m3
Dimension	48 x 98	Hardness (EN 1534) Brinell	20-30	MPa
Weight	2.68 Kg/m			
		Max swelling (dry to wet, tangential direction)	6	%
		Decay resistance (EN 350)	1-2***	Durability class 1-5
		Use class (EN 335)	3.2	
Knots/Pitch pockets	Contains only sound knots	Fire Class Untreated		
Cupping	No limitation	This product is not graded for a visible application and may have stickermarks on one face. Remnants of polymer can be visible. These will not affect the technical quality of the product. *** Sapwood (Heartwood of scots pine has dur. class 3);* Due to the Kebony process the dimension of the profile can vary +/-5%.		
Crook	Max 12 mm / 2 m			
Moisture	8-14 %			
Cracks	Surface cracks may be visible			
Wane	Max. 1/3 of thickness and width			

Weathered



Certifications

Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.