


1127 - Kebony Character Decking 28 x 120

Kebony Character products are produced from PEFC® certified Scots Pine modified with a bio-based liquid.

The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Kebony Character products contain knots and untreated heartwood. The amount of heartwood will vary from board to board.

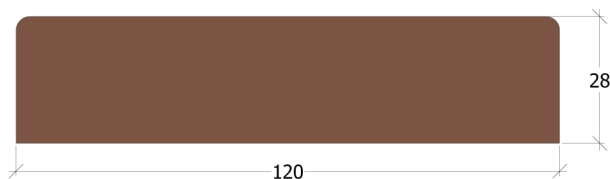

Quality and Technical data

Profile	Rectangular with smooth surface	Density (12 % mc)	570	Kg/m3
Dimension	28 x 120	Hardness (EN 1534) Brinell	20-30	MPa
Weight	1.92 Kg/lm			
		Max swelling (dry to wet, tangential direction)	6	%
		Decay resistance (EN 350)	1-2***	Durability class 1-5
		Use class (EN 335)	3.2*	
		Fire Class Untreated		
Knots/Pitch pockets	Contains only sound knots			
Cupping	Max 2,5% of width			
Crook	Max 5mm / 2 m			
Moisture	8-14 %			
Cracks	Surface cracks may be visible			
Wane	May occur on the back			

Due to the Kebony process the dimension of the profile can vary +/-3%

*** Sapwood (Heartwood of scots pine has dur. class 3);* Installed as per Kebony installation guidelines

Weathered



Certifications

EUTR



EPD

NEPD-407-287-EN



SWAN

2086 001



SINTEF

TG 2493



PEFC

PEFC/03-31-36



Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC) Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.