


Keboony Clear Shiplap 75° 1SLR Click-In 21 x 145

Product Description (Species)

Keboony Clear products are produced from FSC® certified Radiata Pine modified with a bio-based liquid.


The patented Keboony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Keboony Clear products have a primarily clear front surface and are treated through the board.

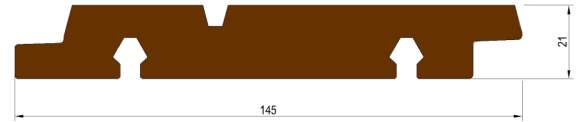

Quality and Appearance upon delivery

Profile	Shiplap with Click-In grooves
Dimension	21 x 145
Standard Length(s)	3,6 - 4,2 - 4,8 m. For availability and possible alternative lengths please contact your Keboony representative or our local Keboony trade partner.
End-treatment	End-matched
Finish	Sanded
Knots/Pitch pockets	May be visible and are a natural occurrence in wood
Cupping	Max 1% of width
Crook	3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm
Moisture	4-8 %
Cracks	Surface cracks may be visible
Wane	May occur on the back
NOTE	There may be defects on the back side. These will not affect the technical quality of the product.

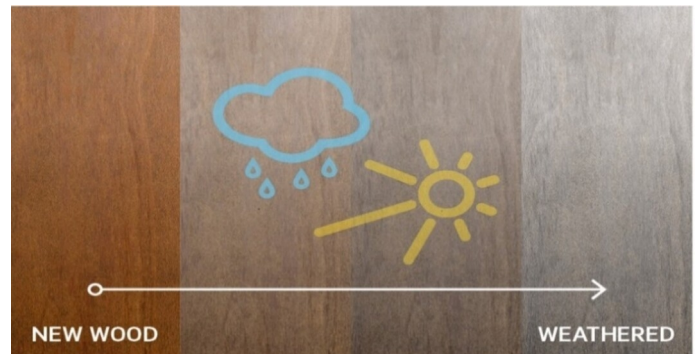

The Keboony technology gives the wood a deep rich brown colour (some natural colour variations will occur and there are possible darker areas as a result of the process). After exposure to sun and rain the wood will develop a natural silver-gray patina where surface cracks and checks may appear, this is a natural development and will not influence the performance and durability of the wood.

For guidance on surface finishes or treatments, such as colours or fire protection, please contact your local sales representative or visit our website.

Technical data (average values)

	Keboony	Untreated	
Density (12 % mc)	637	480	Kg/m3
Hardness (EN 1534)	4.1	2.5	Brinell
Max swelling (dry to wet, tangential direction)	4	8	%
Decay resistance (EN 350)	2	5	Durability class 1-5
Use class (EN 335)	3.1*	1**	

* Suitable for outdoor applications above ground;** Ongoing long-term testing

Certifications

FSC CU-COC-813689 - www.fsc.org
 Nordic Ecolabel 2086 0001 - www.nordic-ecolabel.org
 CE marked according to EN 14915
 Complies with EU Timber Regulation (EUTR)
 Keboony installation guide for cladding - www.kebony.com



Environment

Keboony products are exempted from the EU's biocide directive (76/769/EEC)
 Waste handling as ordinary wood.

Disclaimer

Please refer to our Terms and Conditions available on our website for detailed information.